






# INSWING FRENCH DOOR

INTEGRITY® FROM MARVIN®  
WOOD-ULTREX® SERIES


## Multiple Assemblies - 3 Panel

<b>MO (mm)</b>	7-5 13/16 (2281)	7-5 13/16 (2281)	7-7 7/16 (2323)	7-5 13/16 (2281)
<b>RO (mm)</b>	7-6 5/16 (2294)	7-6 5/16 (2294)	7-7 15/16 (2335)	7-6 5/16 (2294)
<b>FS (mm)</b>	7-5 5/16 (2269)	7-5 5/16 (2269)	7-6 15/16 (2310)	7-5 5/16 (2269)


6-10 1/4 (2089)  
6-10 1/2 (2096)  
6-10 (2083)




IIFD2668 / IIFD5068 XO



IIFD5068 OX / IIFD2668




IIFD2668 / IIFD2668 / IIFD2668




IIFD2668 / IIFD5068 XXL\*\*

<b>MO (mm)</b>	8-11 13/16 (2738)	8-11 13/16 (2738)	9-17 1/16 (2780)	8-11 13/16 (2738)
<b>RO (mm)</b>	9-0 5/16 (2751)	9-0 5/16 (2751)	9-11 5/16 (2792)	9-0 5/16 (2751)
<b>FS (mm)</b>	8-11 5/16 (2726)	8-11 5/16 (2726)	9-0 15/16 (2767)	8-11 5/16 (2726)


6-10 1/4 (2089)  
6-10 1/2 (2096)  
6-10 (2083)




IIFD3068 / IIFD6068 XO



IIFD6068 OX / IIFD3068



IIFD3068 / IIFD3068 / IIFD3068




IIFD3068 / IIFD6068 XXL\*\*

## Round Top Over Inswing French Door


<b>MO (mm)</b>	5-11 1/2 (1816)
<b>RO (mm)</b>	6-0 (1829)
<b>FS (mm)</b>	5-11 (1803)

8-4 1/4 (2546)  
8-4 1/2 (2553)  
8-4 (2540)



IRT7218 DR / IIFD6068 XXL

9-9 3/4 (2991)  
9-10 (2997)  
9-9 1/2 (2985)



IRT7236 DR\* / IIFD6068 XXL


## Direct Glaze Transom Over Inswing French Door

<b>MO (mm)</b>	3-0 13/16 (935)	3-0 13/16 (935)	5-11 1/2 (1816)
<b>RO (mm)</b>	3-1 5/16 (948)	3-1 5/16 (948)	6-0 (1829)
<b>FS (mm)</b>	3-0 5/16 (923)	3-0 5/16 (923)	5-11 (1803)


8-2 (2489)  
8-2 1/4 (2496)  
8-1 3/4 (2483)



IIFDDG3616 / IIFD3068 XR



IIFDDG3616 / IIFD3068 O



IIFDDG7216 / IIFD6068 XXL

Details and Elevations not to scale.

\* This product is only available field mullled.

\*\* 2 and 3 panel XX configurations also available in XX R.

O = Stationary X = Operator

Optional Round Top SDL/Grilles and SDL with Spacer Bar are available in a standard cut, as shown. Round Top GBG cuts are shown on page 3. (Round Top divided lites only available in standard lite cut.)

### MULTIPLE ASSEMBLIES


Multiple assemblies can be factory mullled.

Maximum Rough Opening: not to exceed 109 15/16" x 96" maximum up to 3 units wide by 1 unit high.


Maximum Rough Opening: not to exceed 73 5/8" x 100 1/2" maximum up to 2 units wide by 2 unit high.

Field mull kits available not to exceed 110" x 112". True Half Round transoms are available field mullled only. Structural mullion reinforcement is required for some assemblies. Please consult your local Integrity from Marvin representative for more information.


## Construction Details




Head Jamb and Sill with Sliding Screen




Head Jamb and Sill with Swinging Screen




Direct Glaze Transom Over Inswing French Door



Vertical Mullion O-XO operator

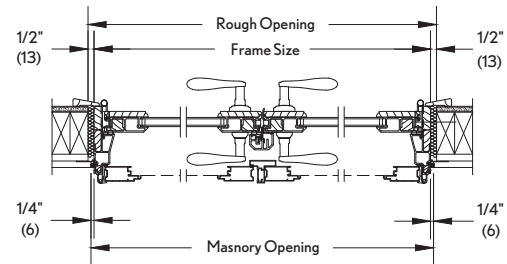

Jamb - XX Operator

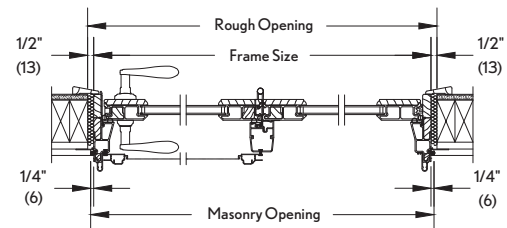

Jamb - XO Operator