

Keeper Retrofit Field Applied Instruction Infinity and Elevate Sliding French Door

You Will Need to Supply

Safety glasses	Drill with 3/16" bit
Tape	Powered screwdriver with Phillips bit
Template	

ATTENTION

Follow the steps below when replacing the keeper on units produced prior to 8/27/2012 for Infinity and 10/15/2012 for Elevate.

1. Remove the existing keeper by removing the four installation screws. See figure 1.

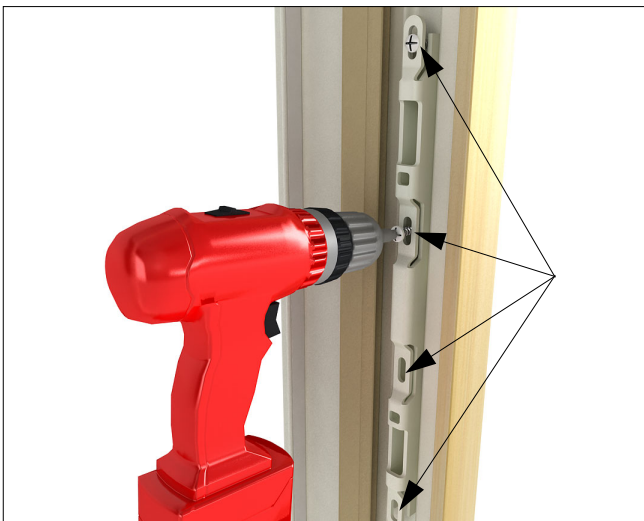


Figure 1 Remove the existing keeper.

2. Install the new keeper. Center the top and bottom screw slots to the existing top and bottom holes and fasten with screws. See figure 2.



Figure 2 Fasten the new keeper by lining up the existing top and bottom screw slots.

3. Using a 3/16" drill bit, drill through the jamb at the middle two slots of the keeper. See figure 3.



Figure 3

4. Install the remaining screws in the middle two slots of the new keeper. See figure 4.



Figure 4 Fasten the new keeper. Refer to the product's installation instructions for more details on handle installation.