


# GLIDER

## 1 Wide and 2 Wide


<b>MO (mm)</b>	3-0 (914)	4-0 (1219)	5-0 (1524)	6-0 (1829)	5-11 1/2 (1816)	7-11 1/2 (2426)
<b>RO (mm)</b>	3-0 1/2 (927)	4-0 1/2 (1232)	5-0 1/2 (1537)	6-0 1/2 (1842)	6-0 (1829)	8-0 (2438)
<b>FS (mm)</b>	2-11 1/2 (902)	3-11 1/2 (1207)	4-11 1/2 (1511)	5-11 1/2 (1816)	5-11 (1803)	7-11 (2413)
<b>DLO (mm)</b>	1-1 11/16 (348)	1-7 11/16 (500)	2-1 11/16 (652)	2-7 11/16 (805)	1-1 11/16 (348)	1-7 11/16 (500)

2-0 (610) 2-0 1/4 (616) 1-11 3/4 (603) 1-5 3/4 (449)						
3-0 (914) 3-0 1/4 (921) 2-11 3/4 (808) 2-5 3/4 (754)						
3-6 (1067) 3-6 1/4 (1073) 3-5 3/4 (1060) 2-11 3/4 (906)						
4-0 (1219) 4-0 1/4 (1226) 3-11 3/4 (1213) 3-5 3/4 (1059)						
5-0 (1524) 5-0 1/4 (1530) 4-11 3/4 (1518) 4-5 3/4 (1384)						

### Construction Details

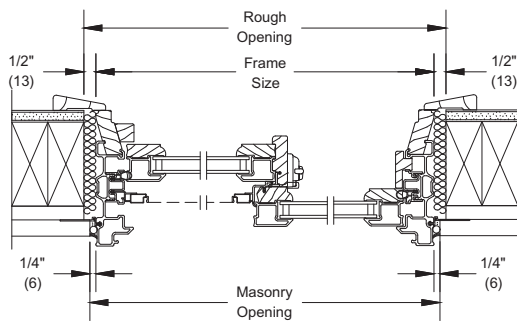


XO Operator Jamb

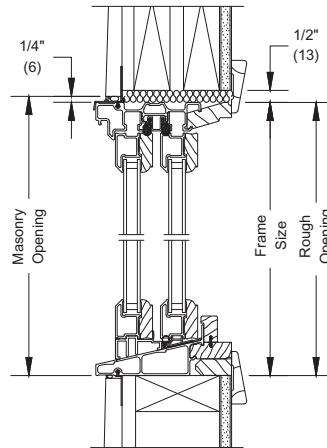

Head Jamb and Sill

### Mullion Detail



Vertical Mullion Operator Unit

Details and Elevations not to scale.

Special sized units available within product size matrix. See your Marvin retailer.

E = These windows meet National Egress Codes for fire evacuation. Local codes may differ.

\* These windows meet National Egress Codes for fire evacuation if floor to sill height does not exceed 44" (118 mm). Local codes may differ.

XO operation standard, OX operation optional.

Optional Glider GBGs and SDLs are available in a standard Rectangular cut shown. Other available lite cuts shown on page 3.

When ordering 6 9/16" (167 mm) or 6 13/16" (173 mm) jambs, add 1/4" (6 mm) to width and 1/8" (3 mm) to height for Rough Opening, Frame Size and Masonry Opening.
















For further details and drawings visit the 'Tools and Documents' section at Marvin.com.

# GLIDER - TRIPLE SASH


1 Wide

MO (mm)	6-0 (1829)	7-0 (2134)	8-0 (2438)
RO (mm)	6-0 1/2 (1842)	7-0 1/2 (2146)	8-0 1/2 (2451)
FS (mm)	5-11 1/2 (1816)	6-11 1/2 (2121)	7-11 1/2 (2426)


  

2-0 (610)			
2-0 1/4 (616)			
1-11 3/4 (603)			
3-0 (914)			
3-0 1/4 (921)			
2-11 3/4 (908)			
3-6 (1067)			
3-6 1/4 (1073)			
3-5 3/4 (1060)			
4-0 (1219)			
4-0 1/4 (1226)			
3-11 3/4 (1213)			
5-0 (1524)			
5-0 1/4 (1530)			
4-11 3/4 (1518)			

## Construction Details

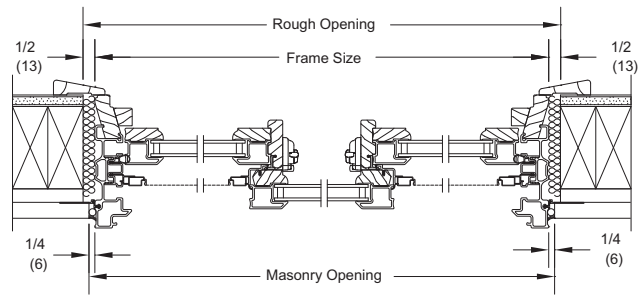

Triple Sash XOJ Operator Jamb

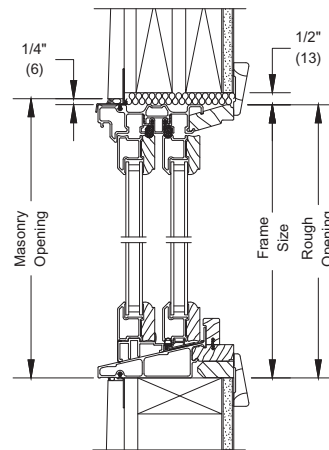

Head Jamb and Sill

### MULTIPLE ASSEMBLIES

Multiple assemblies can be factory mullied.

MAXIMUM ROUGH OPENING not to exceed 113 1/2" x 60 1/4" Maximum up to 3 units wide by 1 unit high.

Field mull kits are available. Structural mullion reinforcement is required for some assemblies.

Please consult your local Marvin representative for more information.