













MARVIN ESSENTIAL™ COLLECTION
SLIDING PATIO DOOR

2 Panel

MO (mm)	5' - 0" (1524)	5' - 0" (1524)	5' - 10 1/2" (1791)	5' - 10 1/2" (1791)	6' - 0" (1829)	6' - 0" (1829)
RO (mm)	5' - 0" (1524)	5' - 0" (1524)	5' - 10 1/2" (1791)	5' - 10 1/2" (1791)	6' - 0" (1829)	6' - 0" (1829)
FS (mm)	4' - 11 1/2" (1511)	4' - 11 1/2" (1511)	5' - 10" (1778)	5' - 10" (1778)	5' - 11 1/2" (1816)	5' - 11 1/2" (1816)
DLO (mm)	24 63/64" (635)	24 63/64" (635)	30 15/64" (768)	30 15/64" (768)	30 63/64" (787)	30 63/64" (787)

<p>6' - 7 3/4" (2026) 6' - 8" (2032) 6' - 7 1/2" (2019) 72 1/2" (1841)</p>						
<p>6' - 9 3/4" (2076) 6' - 10" (2083) 6' - 9 1/2" (2070) 74 1/2" (1892)</p>						
<p>7' - 11 3/4" (2432) 8' - 0" (2438) 7' - 11 1/2" (2426) 88 1/2" (2248)</p>						

GBG available in standard Rectangular lite cut, shown above. Other GBG lite cuts shown on page 3. (Not available on In-Sash Transom units.)

Details and Elevations not to scale.

Special sized units available within two panel product size matrix. See your Marvin representative for more information.

See page 52 for specific PG Ratings.

For further details and drawings visit the 'Tools and Documents' section at Marvin.com.

MULTIPLE ASSEMBLIES

Multiple assembly units can be factory mullied up to 1 unit wide by 2 units high.

MAXIMUM ROUGH OPENING not to exceed 72" x 100 1/2".













Field mull kits available for up to 3 units wide by 2 units high not to exceed 110" x 112". Structural mullion reinforcement is required for some assemblies.

Please consult your local Marvin representative for more information.

SLIDING PATIO DOOR


3 Panel

MO (mm)	9' - 0" (2743)	9' - 0" (2743)	9' - 0" (2743)	9' - 0" (2743)
RO (mm)	9' - 0" (2743)	9' - 0" (2743)	9' - 0" (2743)	9' - 0" (2743)
FS (mm)	8' - 11 1/2" (2731)	8' - 11 1/2" (2731)	8' - 11 1/2" (2731)	8' - 11 1/2" (2731)
DLO (mm)	30 63/64" (787)	30 63/64" (787)	30 63/64" (787)	30 63/64" (787)

6' - 7 3/4" (2026) 6' - 8" (2032) 6' - 7 1/2" (2019) 72 1/2" (1841)				
6' - 9 3/4" (2076) 6' - 10" (2083) 6' - 9 1/2" (2070) 74 1/2" (1892)				
7' - 11 3/4" (2432) 8' - 0" (2438) 7' - 11 1/2" (2426) 88 1/2" (2248)				









Direct Glaze Over Sliding Patio Door

MO (mm)	6' - 0" (1829)
RO (mm)	6' - 0" (1829)
FS (mm)	5' - 11 1/2" (1816)

8' - 3 3/4" (2534) 8' - 4" (2540) 8' - 3 1/2" (2527)	
ESDG6016/ESSPD60610	


Direct Glaze Over Sliding Patio Door

MO (mm)	5' - 0" (1524)	5' - 10 1/2" (1791)	6' - 0" (1829)	9' - 0" (2743)
RO (mm)	5' - 0" (1524)	5' - 10 1/2" (1791)	6' - 0" (1829)	9' - 0" (2743)
FS (mm)	4' - 11 1/2" (1511)	5' - 10" (1778)	5' - 11 1/2" (1816)	8' - 11 1/2" (2731)
DLO (mm)	57 1/4" (1454)	67 1/4" (1708)	69 1/4" (1759)	105 1/4" (2673)


0' - 11 3/4" (298) 1' - 0" (305) 0' - 11 1/2" (292) 8 1/16" (205)				
1' - 5 3/4" (451) 1' - 6" (457) 1' - 5 1/2" (445) 14 1/16" (357)				
	ESDG5010	ESDG51010	ESDG6010	ESDG9010
	ESDG5016	ESDG51016	ESDG6016	ESDG9016

MARVIN ESSENTIAL™ COLLECTION
SLIDING PATIO DOOR


Construction Details

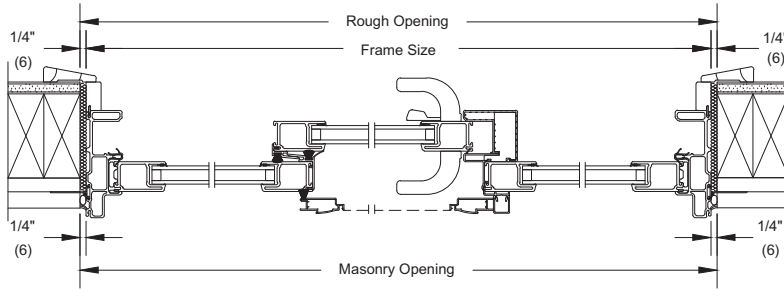


3 Panel OXO Operator Jamb

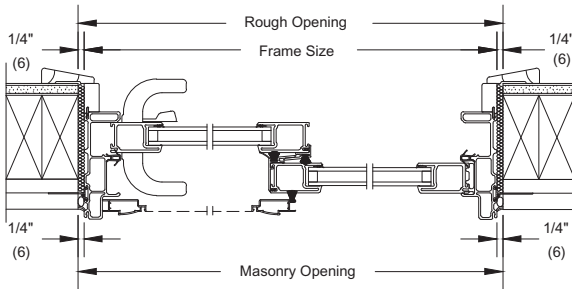

2 Panel XO Operator Jamb

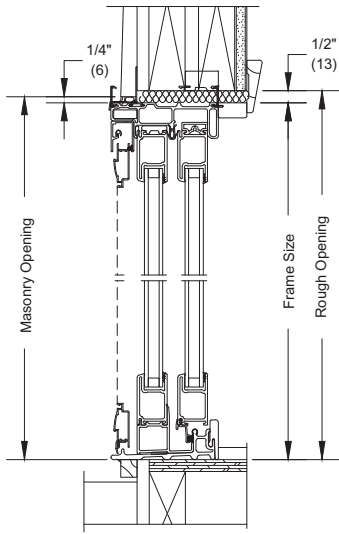

Head Jamb & Sill



Direct Glaze
 Over Sliding Patio Door

GBG available in standard Rectangular lite cut, shown above. Other GBG lite cuts shown on page 3. (Not available on In-Sash Transom units)

Details and Elevations not to scale.

Special sized units available within product size matrix. See your Marvin retailer.

See page 52 for specific PG Ratings.

XO operation shown, OX operation optional.

For further details and drawings visit the 'Tools and Documents' section at Marvin.com.

MULTIPLE ASSEMBLIES

Multiple assembly units can be factory mullied up to 1 unit wide by 2 units high.

MAXIMUM ROUGH OPENING not to exceed 72" x 100 1/2".

Field mull kits available for up to 3 units wide by 2 units high not to exceed 110" x 112". Structural mullion reinforcement is required for some assemblies.

Please consult your local Marvin representative for more information.