

# Marvin Lock Status Sensor Door Display Installation Instructions

---

1. Remove plate on door panel. [See Figure 1.](#)



Figure 1

2. Place a charged battery in receiver on door plate. [See Figure 2.](#)

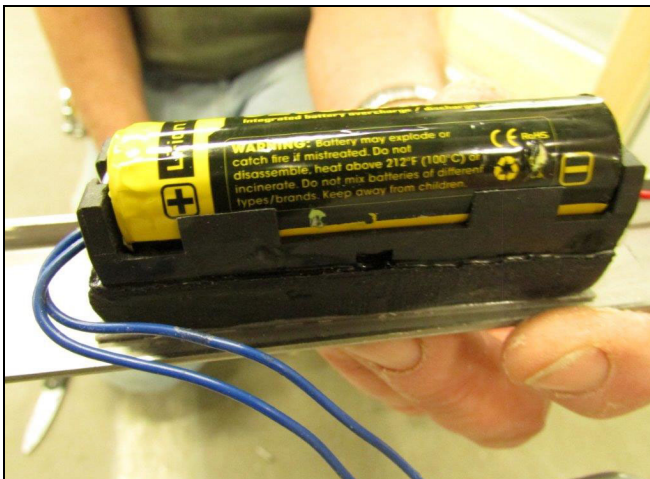


Figure 2

3. Attach plate to door.



Figure 3

4. Attach receiver to Lock Status Sensor (LSS) plate. [See Figure 4.](#)

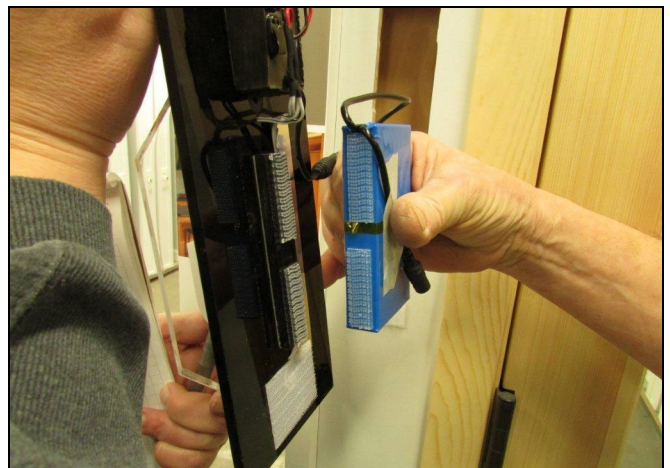


Figure 4

5. Connect receiver cords. Turn receiver to on position. [See Figure 4.](#)



Figure 5

6. Remove backing on hook and loop fastener. Center LSS Plate and attach to Display wall. Ensure all cords are contained within wall opening. [See Figure 6.](#)



Figure 6

7. Unit has a three minute timer. Cycle unit once before using. [See Figure 7.](#)



Figure 7