


# SLIDING PATIO DOOR

INTEGRITY® FROM MARVIN®  
WOOD-ULTREX® SERIES


## 2 Panel Sliding Patio Doors

<b>MO (mm)</b>	4-11 1/2 (1511)	5-11 1/2 (1816)
<b>RO (mm)</b>	5-0 (1524)	6-0 (1829)
<b>FS (mm)</b>	4-11 (1499)	5-11 (1803)
<b>DLO (mm)</b>	25 (635)	31 (787)

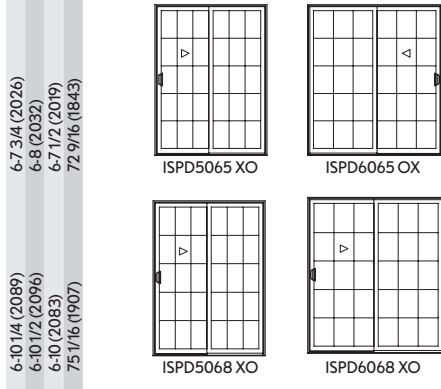


## 3 Panel Sliding Patio Doors

<b>MO (mm)</b>	7-5 (2261)	7-5 (2261)	7-5 (2261)
<b>RO (mm)</b>	7-5 1/2 (2273)	7-5 1/2 (2273)	7-5 1/2 (2273)
<b>FS (mm)</b>	7-4 1/2 (2248)	7-4 1/2 (2248)	7-4 1/2 (2248)
<b>DLO (mm)</b>	25 (635)	25 (635)	25 (635)

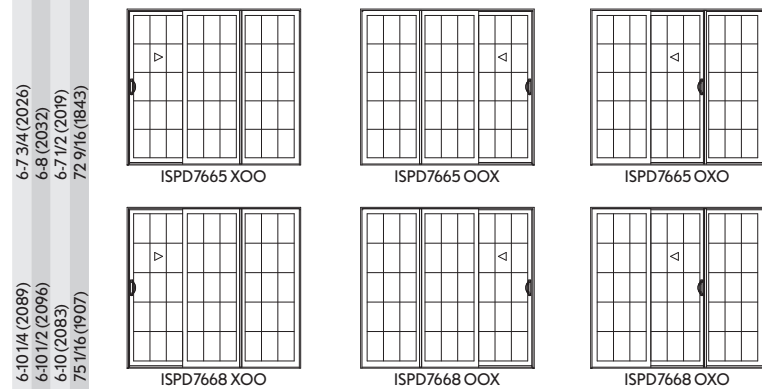


## Round Top Over Sliding Patio Door

<b>MO (mm)</b>	5-11 1/2 (1816)
<b>RO (mm)</b>	6-0 (1829)
<b>FS (mm)</b>	5-11 (1803)

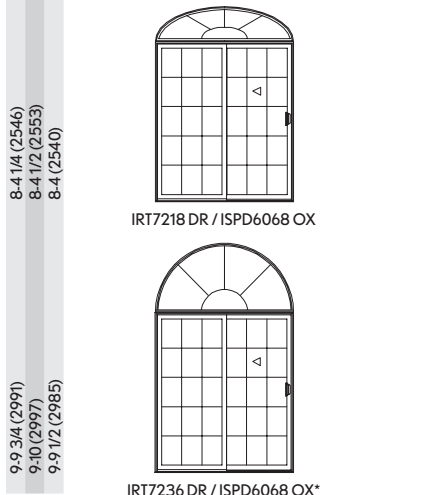

<b>MO (mm)</b>	8-11 (2718)	8-11 (2718)	8-11 (2718)
<b>RO (mm)</b>	8-11 1/2 (2731)	8-11 1/2 (2731)	8-11 1/2 (2731)
<b>FS (mm)</b>	8-10 1/2 (2705)	8-10 1/2 (2705)	8-10 1/2 (2705)
<b>DLO (mm)</b>	31 (787)	31 (787)	31 (787)

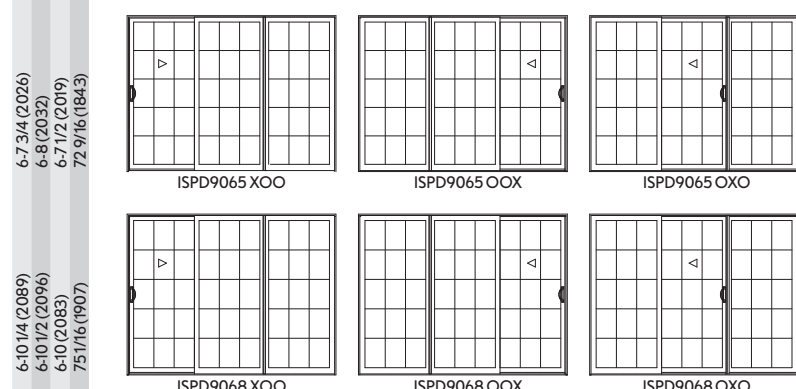


## Sliding Patio Door Direct Glaze Transom

<b>MO (mm)</b>	5-11 1/2 (1816)	8-11 (2718)
<b>RO (mm)</b>	6-0 (1829)	8-11 1/2 (2731)
<b>FS (mm)</b>	5-11 (1803)	8-10 1/2 (2705)
<b>DLO (mm)</b>	66 5/8 (1692)	102 1/8 (2594)



## Direct Glaze Transom Over Sliding Patio Door

<b>MO (mm)</b>	5-11 1/2 (1816)
<b>RO (mm)</b>	6-0 (1829)
<b>FS (mm)</b>	5-11 (1803)

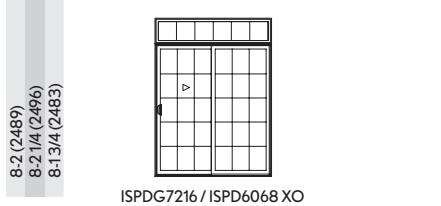

**MULTIPLE ASSEMBLIES**

Multiple assembly units can be factory mulled up to 1 unit wide by 2 units high. Maximum Rough Opening not to exceed 72" x 100 1/2"

Field mull kits available not to exceed 110" x 112".

True Half Round transoms are available field mulled only. Structural mullion reinforcement is required for some assemblies.

Please consult your local Integrity representative for more information.

Details and Elevations not to scale.

XO operation shown, OX operation optional. When ordering 6 9/16" (167 mm) or 6 13/16" (173 mm) jambs, add 1/4" (6 mm) to width and 1/8" (3 mm) to height for Rough Opening, Frame Size and Masonry Opening.

Optional Direct Glaze transom Grilles, GBGs and SDLs are available in a standard Rectangular cut, as shown. Alternate transom lite cuts available to align with select lite cut options shown on page 3. Optional Round Top SDL/Grilles and SDL with Spacer Bar are available in a standard cut, as shown. Round Top GBG cuts are shown on page 35. (Round Top divided lites not available in other lite cuts.)

\* This product is only available field mulled.